




Made to last
Patented systems

SINCE 2012
IDEAL SOLAR
MOUNTING SYSTEM
FOR FLAT ROOFS

Technical Sheet


Ballast 15°

ART.23015

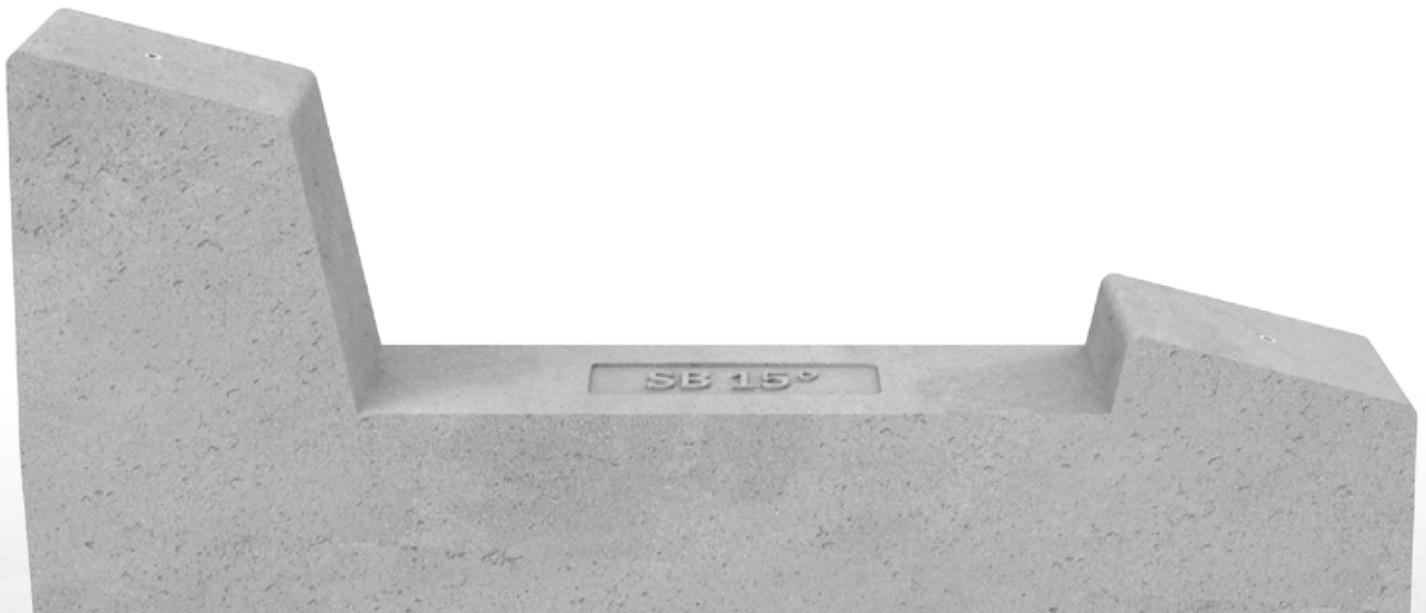

BALLAST 15°


ART. 23015

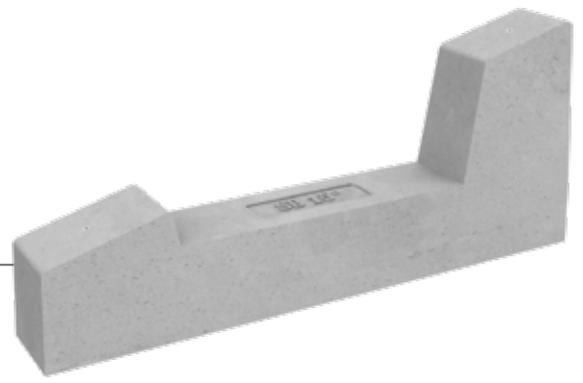




The Single-Row system offers a simple and highly versatile solution: available in a wide range of tilt angles from 0° to 30°, the ballasts allow for mounting of the panels vertically, horizontally, or with an East-West orientation. The mounting system enables flexible modulation of the distance between rows, ensuring an easy and fast installation, even in the presence of roof obstacles.

Tilt angle	15°
Module positioning	Horizontal - Short side / Vertical - Long side
Ballast weight	60 kg
Quantity per pallet	8 pieces
Pallet dimensions	990x720x690h mm
Pallet weight	610 kg
Compatible accessories	Sheathing (KGNF2325), Universal clamps (K23900/U.50, K23920/U.50), PowerClamp (K23900/PWC.50, 23920/PWC), Junction plate (K23804), U-Block (23015.CRP - 23030.CRP), No-Flex (K23712) Cablowind (CW.CABLOWIND.95 - CW.CABLOWIND.160 - CW.CABLOWIND.185)




BALLAST DIMENSIONS

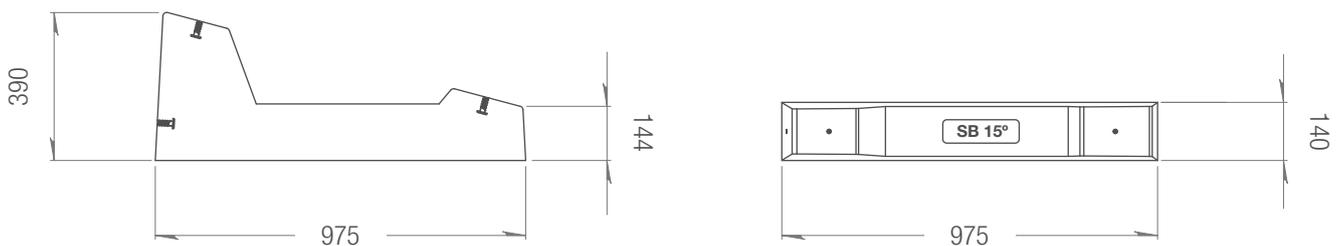

HORIZONTAL MODULE INSTALLATION - Short Side

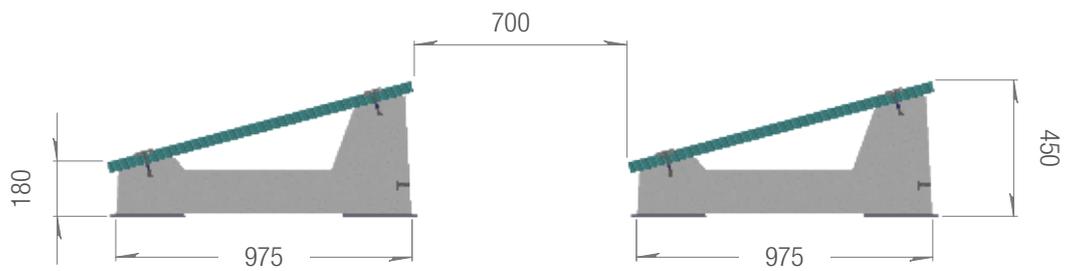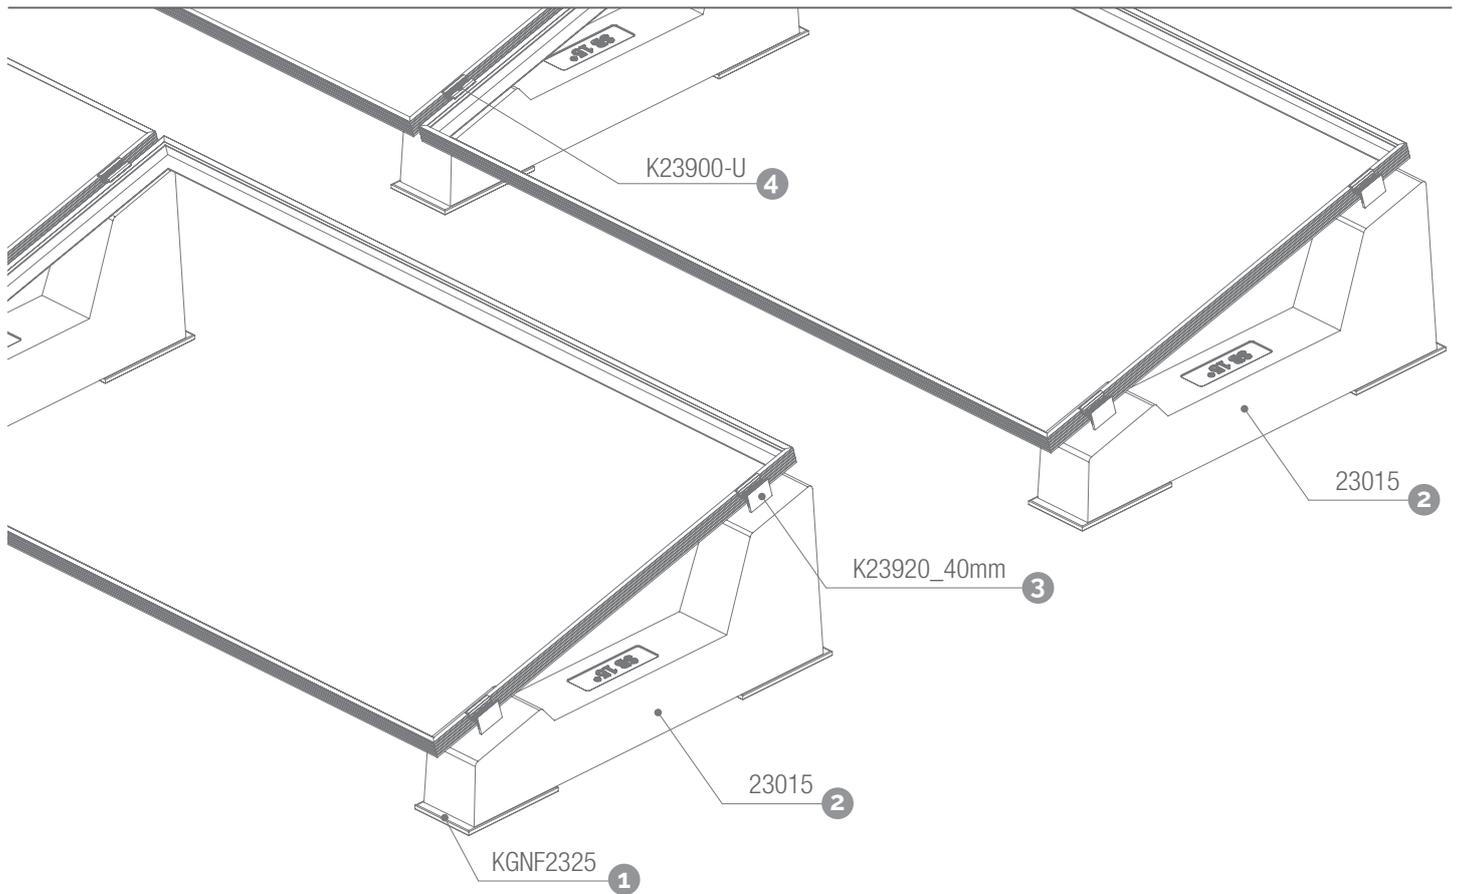

VERTICAL MODULE INSTALLATION - Long Side

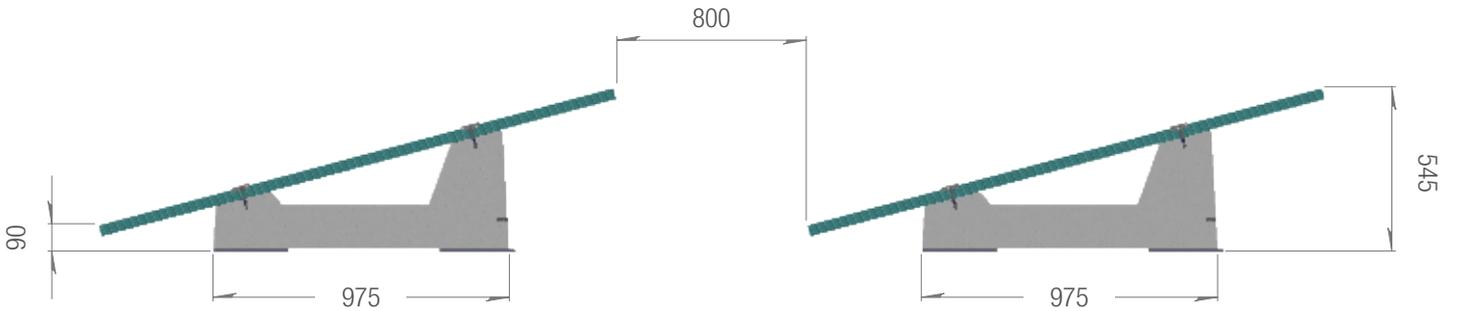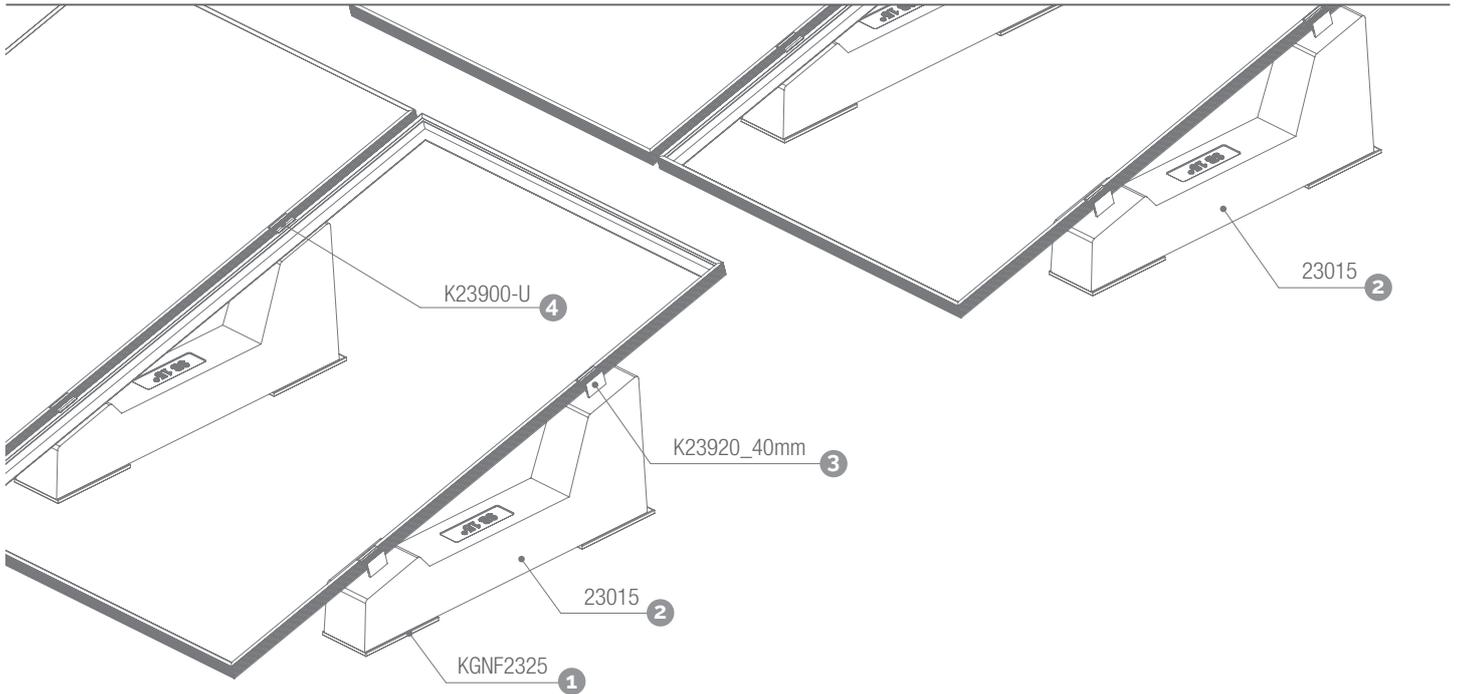

INFO

The images shown are for illustrative purposes only and may differ slightly.

The dimensions indicated in this section are approximate; therefore, it is important to refer to the project developed by Sun Ballast®.

All dimensions shown in the figure are expressed in millimeters.

TECHNICAL CHARACTERISTICS

Description:

Precast unreinforced concrete ballast.
(Inside, there is an iron rod to increase mechanical flexibility)

- Exposure class: XC4;
- Strength class: C32/40;
- Minimum cement content: 340 kg/m³;
- Fire resistance class: Class 0 (Italian class) A1 (European class with ref. UNI EN 13501-1:2019);
- Maximum H₂O penetration depth under pressure 500 kPa: 15 mm;
- Maximum H₂O penetration depth under pressure 500 kPa: 15 mm;
- Weight tolerance: ±5%;
- Measurement: ±5 mm;
- Determination of pullout force of M8 threaded insert embedded in CLS element by direct pulling of M8 threaded bar screwed into it.

Results of the tensile test at 15 KN (1530 kg):

No slipping of the threaded insert;

Fracture of the threaded bar.

BASIC S.R.L Benefit Corporation, in the person of its legal representative, declares that production complies with UNI EN 206 and UNI 11104 standards, instructions, and procedures of the quality management system by UNI EN ISO 9001:2015 with TUV certification.

Any modification made to the product referred to in this declaration without the manufacturer's authorization voids this declaration of technical requirements. The technical characteristics of the product are listed below.





Made to last
Patented systems

CONTACTS

INFORMATION AND FIRST CONTACT


info@sunballast.com

COMMERCIAL CONSULTING

commerciale@sunballast.com

TECHNICAL SUPPORT

tecnico@sunballast.com

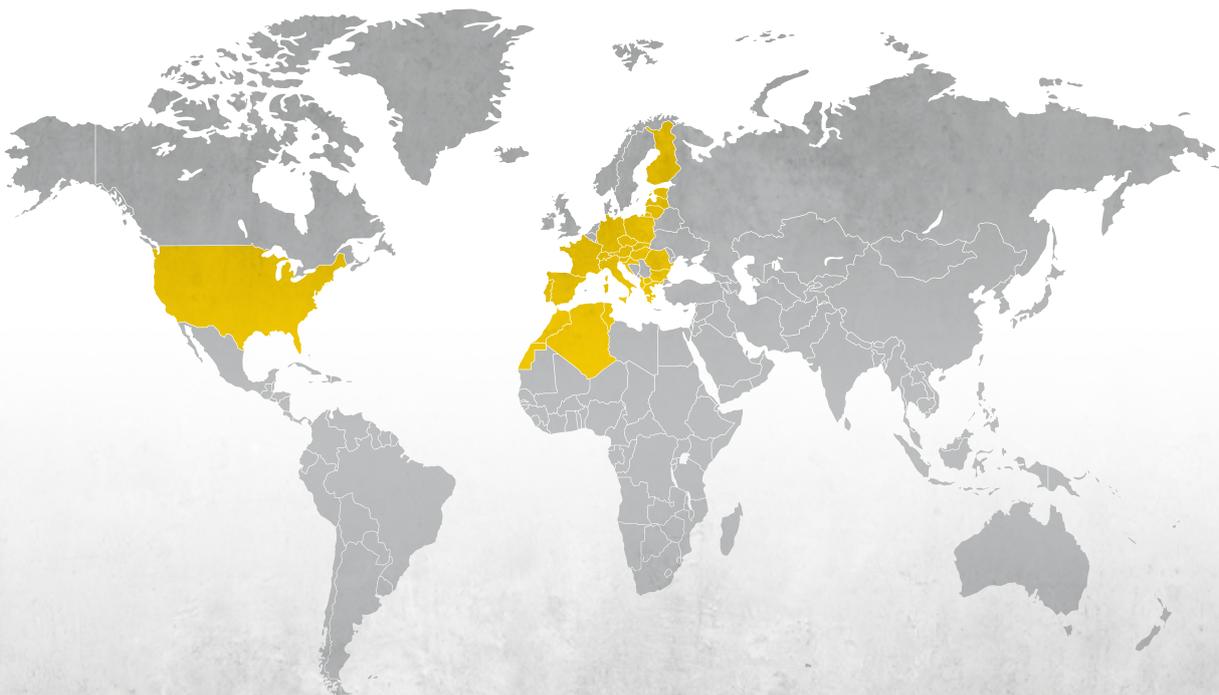

MADE TO LAST.

www.sunballast.com