



Made to last  
Patented systems

SINCE 2012  
IDEAL SOLAR  
MOUNTING SYSTEM  
FOR FLAT ROOFS

# Technical Sheet

## Ballast 20°

ART.23020



# BALLAST 20°


ART. 23020






The Single-Row system offers a simple and highly versatile solution: available in a wide range of tilt angles from 0° to 30°, the ballasts allow for mounting of the panels vertically, horizontally, or with an East-West orientation. The mounting system enables flexible modulation of the distance between rows, ensuring an easy and fast installation, even in the presence of roof obstacles.

<b>Tilt angle</b>	20°
<b>Module positioning</b>	Horizontal - Short side / Vertical - Long side
<b>Ballast weight</b>	61 kg
<b>Quantity per pallet</b>	10 pieces
<b>Pallet dimensions</b>	700x900x890h mm
<b>Pallet weight</b>	626 kg
<b>Compatible accessories</b>	Sheathing (KGNF2325), Universal clamps (K23900/U.50, K23920/U.50), PowerClamp (K23900/PWC.50, 23920/PWC), Junction plate (K23804), U-Block (23015.CRP - 23030.CRP), No-Flex (K23712) Cablowind (CW.CABLOWIND.95 - CW.CABLOWIND.160 - CW.CABLOWIND.185)



## BALLAST DIMENSIONS

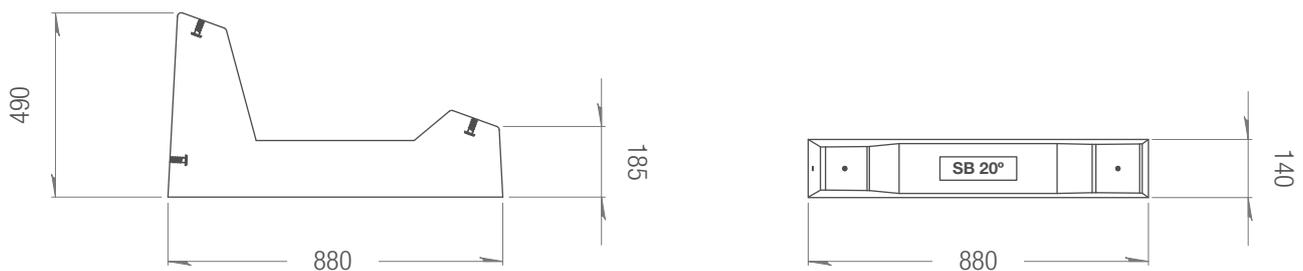

### HORIZONTAL MODULE INSTALLATION - Short Side

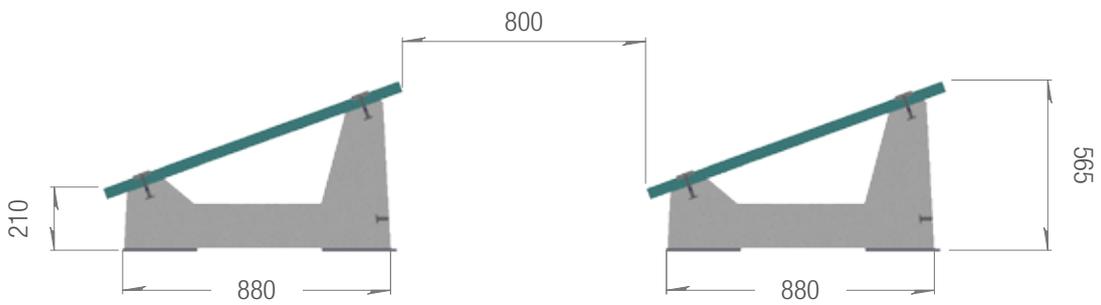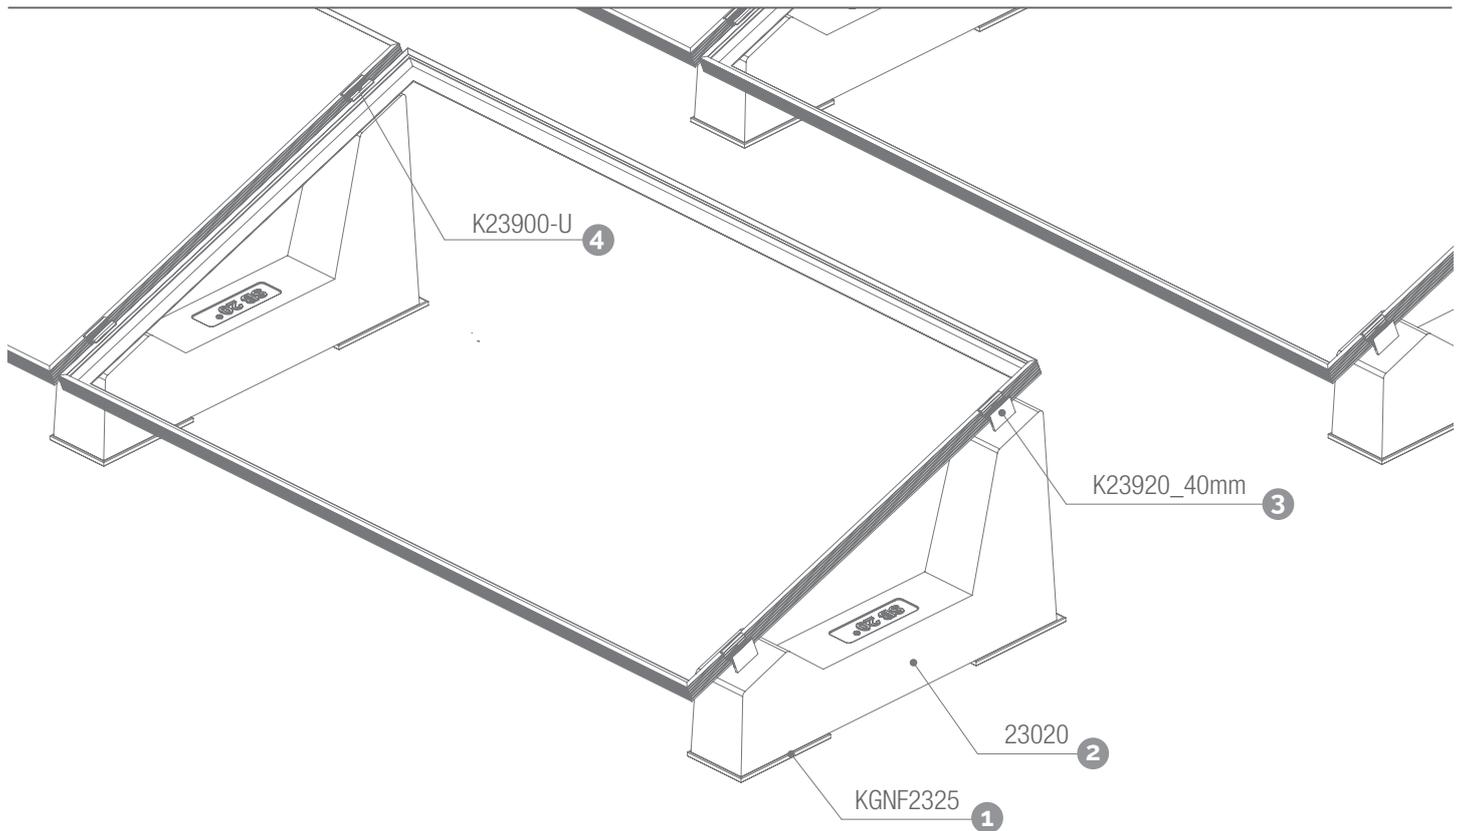

## VERTICAL MODULE INSTALLATION - Long Side

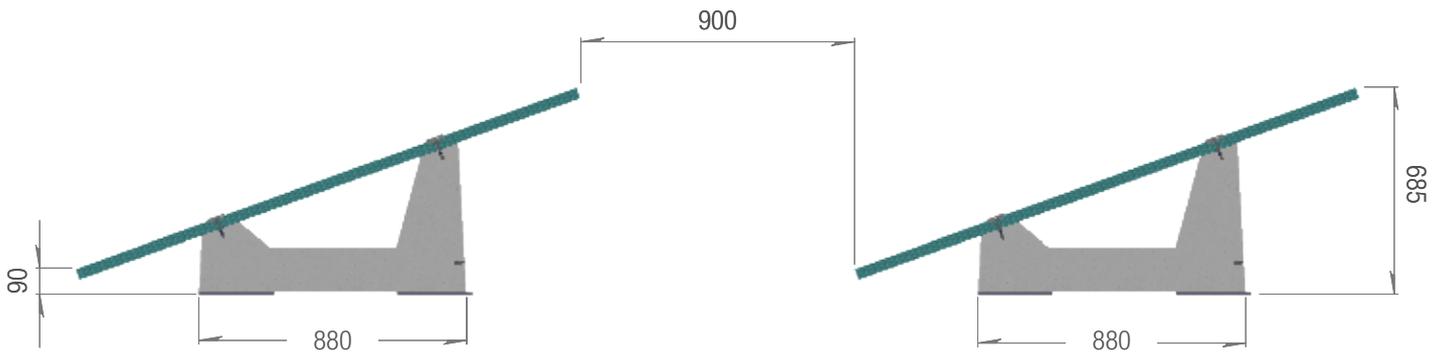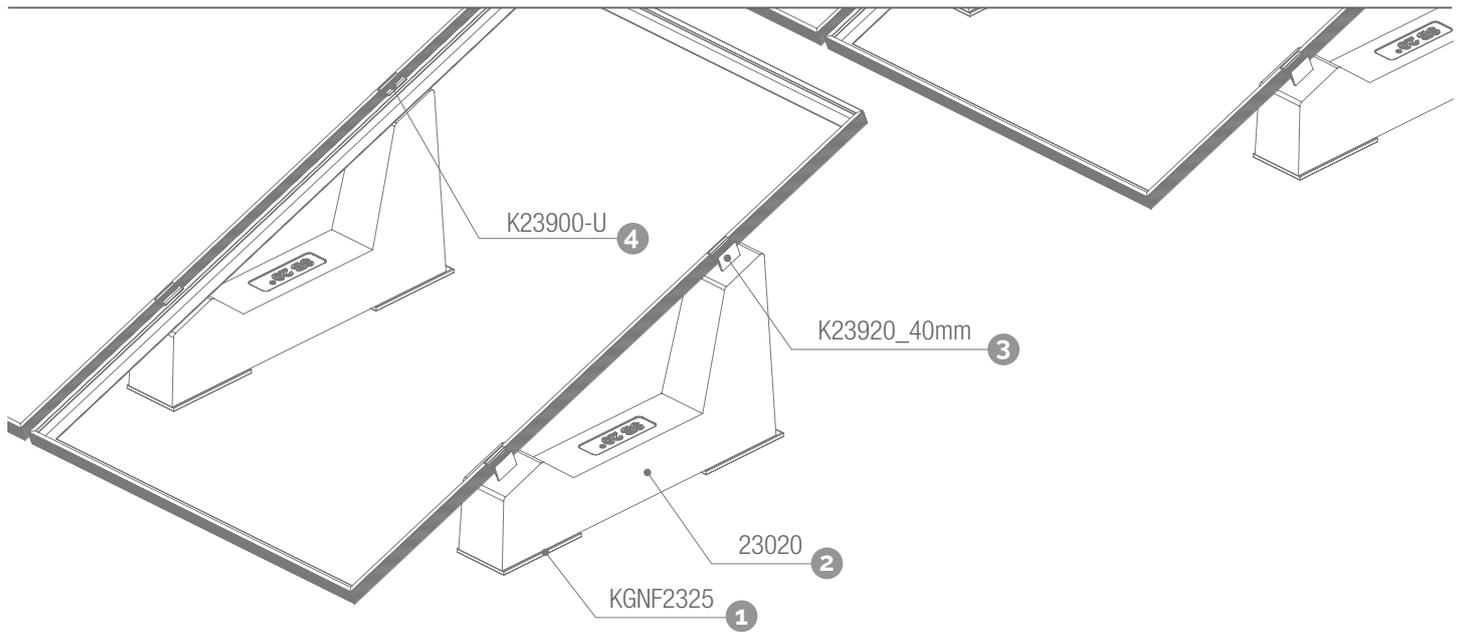

### INFO

The images shown are for illustrative purposes only and may differ slightly.

The dimensions indicated in this section are approximate; therefore, it is important to refer to the project developed by Sun Ballast®.

All dimensions shown in the figure are expressed in millimeters.

## TECHNICAL CHARACTERISTICS

### Description:

Precast unreinforced concrete ballast.  
(Inside, there is an iron rod to increase mechanical flexibility)

- Exposure class: XC4;
- Strength class: C32/40;
- Minimum cement content: 340 kg/m<sup>3</sup>;
- Fire resistance class: Class 0 (Italian class) A1 (European class with ref. UNI EN 13501-1:2019);
- Maximum H<sub>2</sub>O penetration depth under pressure 500 kPa: 15 mm;
- Maximum H<sub>2</sub>O penetration depth under pressure 500 kPa: 15 mm;
- Weight tolerance: ±5%;
- Measurement: ±5 mm;
- Determination of pullout force of M8 threaded insert embedded in CLS element by direct pulling of M8 threaded bar screwed into it.

Results of the tensile test at 15 KN (1530 kg):

No slipping of the threaded insert;

Fracture of the threaded bar.

BASIC S.R.L Benefit Corporation, in the person of its legal representative, declares that production complies with UNI EN 206 and UNI 11104 standards, instructions, and procedures of the quality management system by UNI EN ISO 9001:2015 with TUV certification.

Any modification made to the product referred to in this declaration without the manufacturer's authorization voids this declaration of technical requirements. The technical characteristics of the product are listed below.





**Made to last**  
Patented systems

## CONTACTS

---

### INFORMATION AND FIRST CONTACT

[info@sunballast.com](mailto:info@sunballast.com)

---


### COMMERCIAL CONSULTING

[commerciale@sunballast.com](mailto:commerciale@sunballast.com)

---

### TECHNICAL SUPPORT

[tecnico@sunballast.com](mailto:tecnico@sunballast.com)

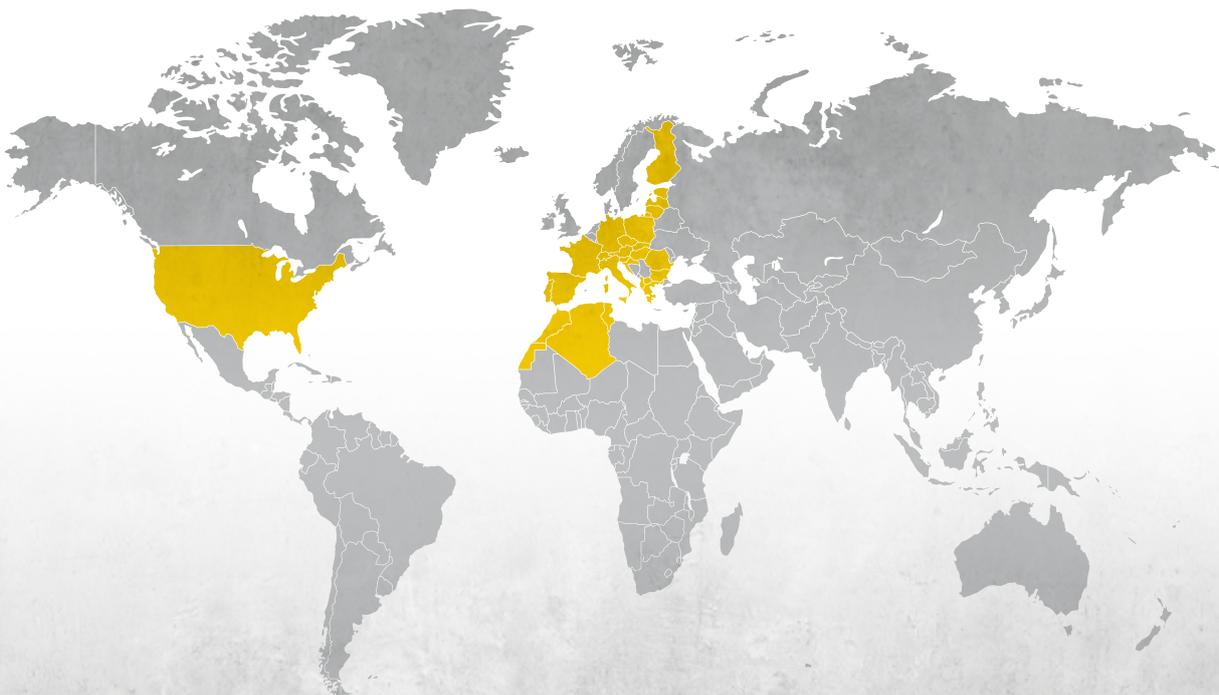

**MADE TO LAST.**

[www.sunballast.com](http://www.sunballast.com)