




Made to last  
Patented systems

SINCE 2012  
IDEAL SOLAR  
MOUNTING SYSTEM  
FOR FLAT ROOFS

# Technical Sheet Connect 30°

ART.23030.CF/CR/CRT

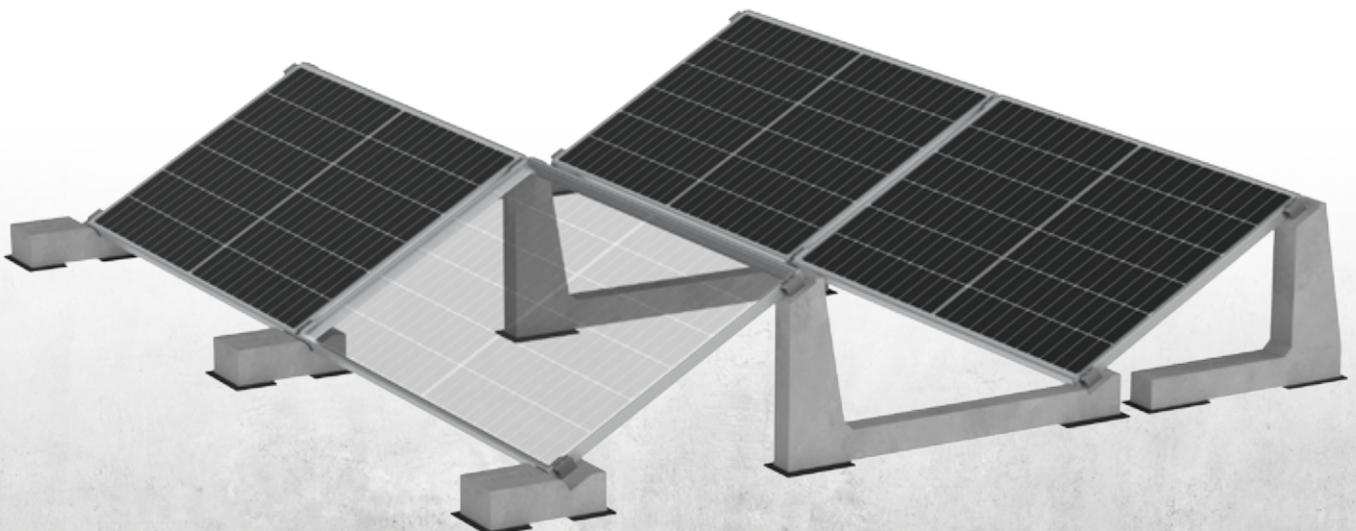

# CONNECT 30°

ART. 23030.CF/CR/CRT



The perfect balance between strength and lightness: the Connect system links modules and ballasts into a single reticular structure, reducing roof loads and transportation costs, while ensuring perfectly balanced weight distribution.

**Tilt angle** 30°

**Module positioning** Horizontal - Short side

**Compatible accessories** Sheathing (KGNF2325), Universal clamps (K23900/U.50, K23920/U.50), PowerClamp (K23900/PWC.50, 23920/PWC), Junction plate (K23804), U-Block (23015.CRP - 23030.CRP), No-Flex (K23712)

## BALLAST ART. 23030.CF

<b>Ballast weight</b>	21 kg	<b>Pallet dimensions</b>	1230x810x402h mm
<b>Quantity per pallet</b>	24 pieces	<b>Pallet weight</b>	520 kg

## BALLAST ART. 23030.CR

<b>Ballast weight</b>	45 kg	<b>Pallet dimensions</b>	1280x730x740h mm
<b>Quantity per pallet</b>	12 pieces	<b>Pallet weight</b>	558 kg

## BALLAST ART. 23030.CRT


<b>Ballast weight</b>	44 kg	<b>Pallet dimensions</b>	730x790x788h mm
<b>Quantity per pallet</b>	10 pieces	<b>Pallet weight</b>	452 kg

**BALLAST 23030.CF DIMENSIONS**


---

**BALLAST 23030.CR DIMENSIONS**




---

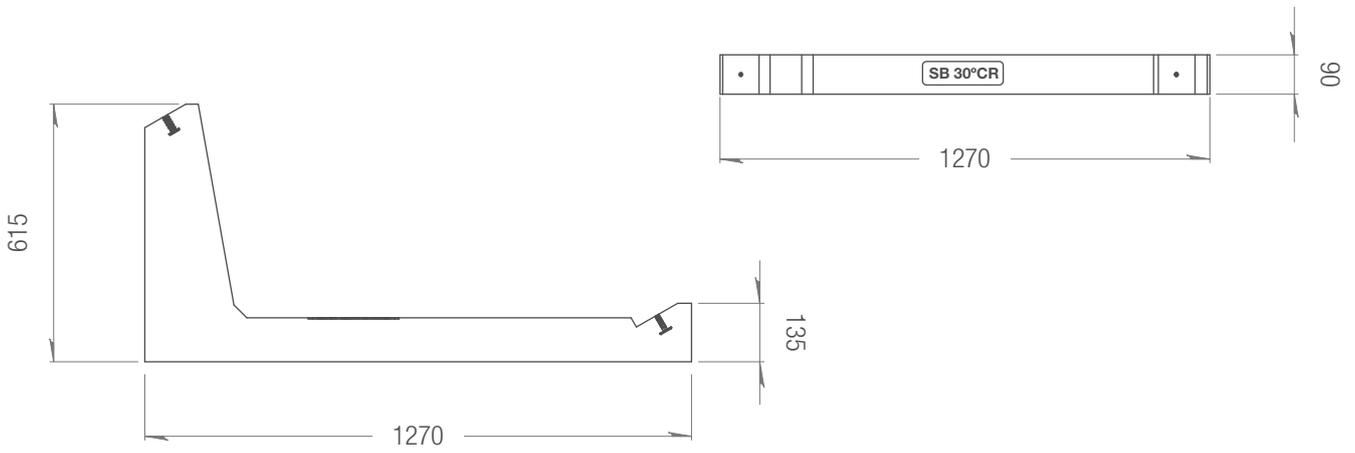**BALLAST 23030.CRT DIMENSIONS**

---

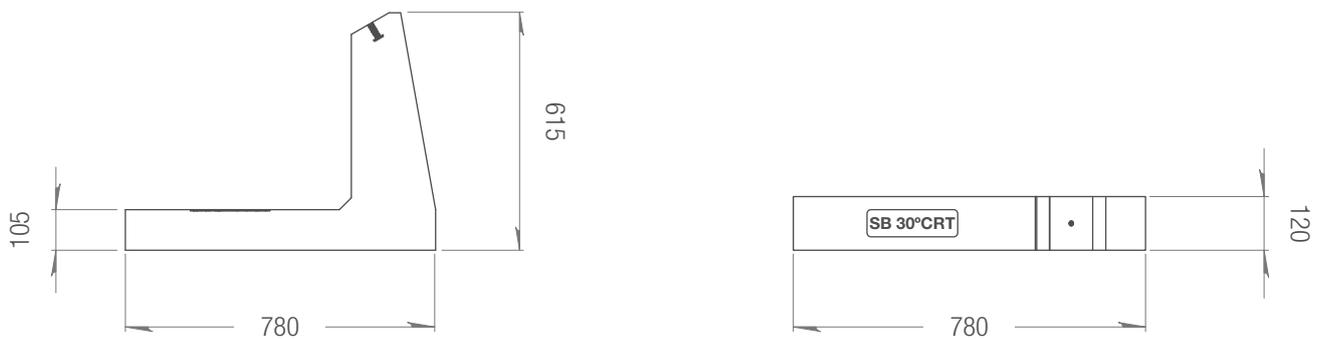

## HORIZONTAL MODULE INSTALLATION - Short Side

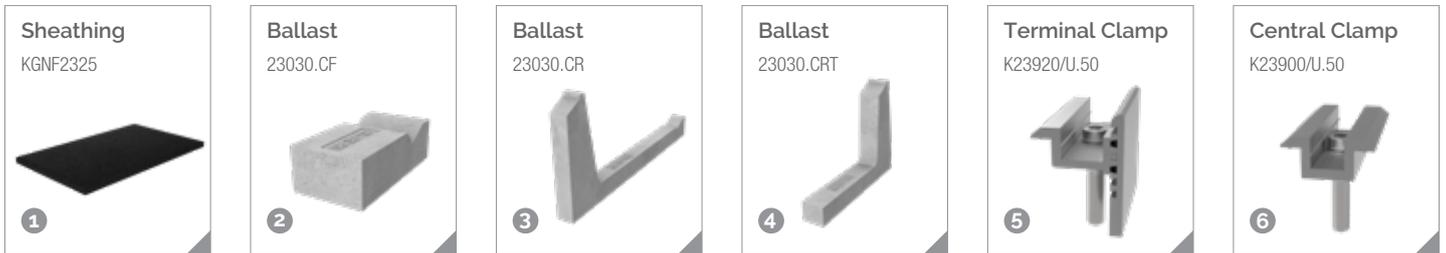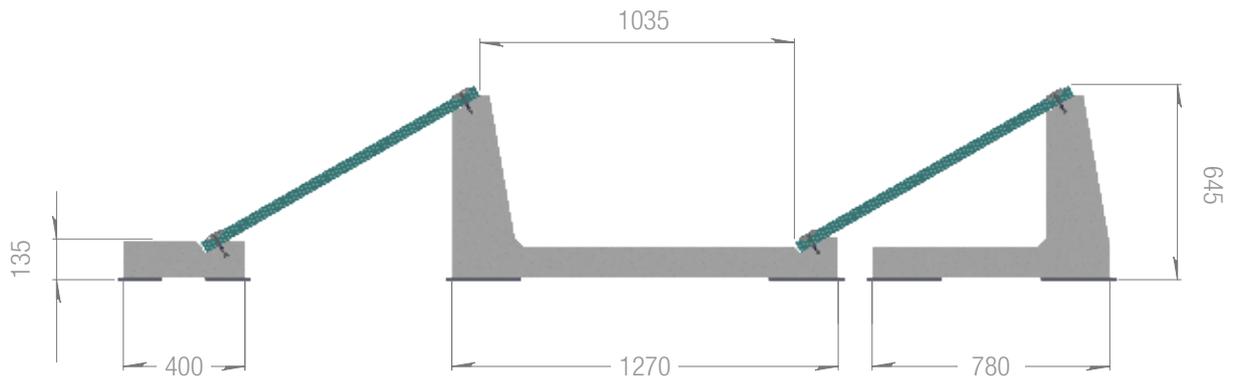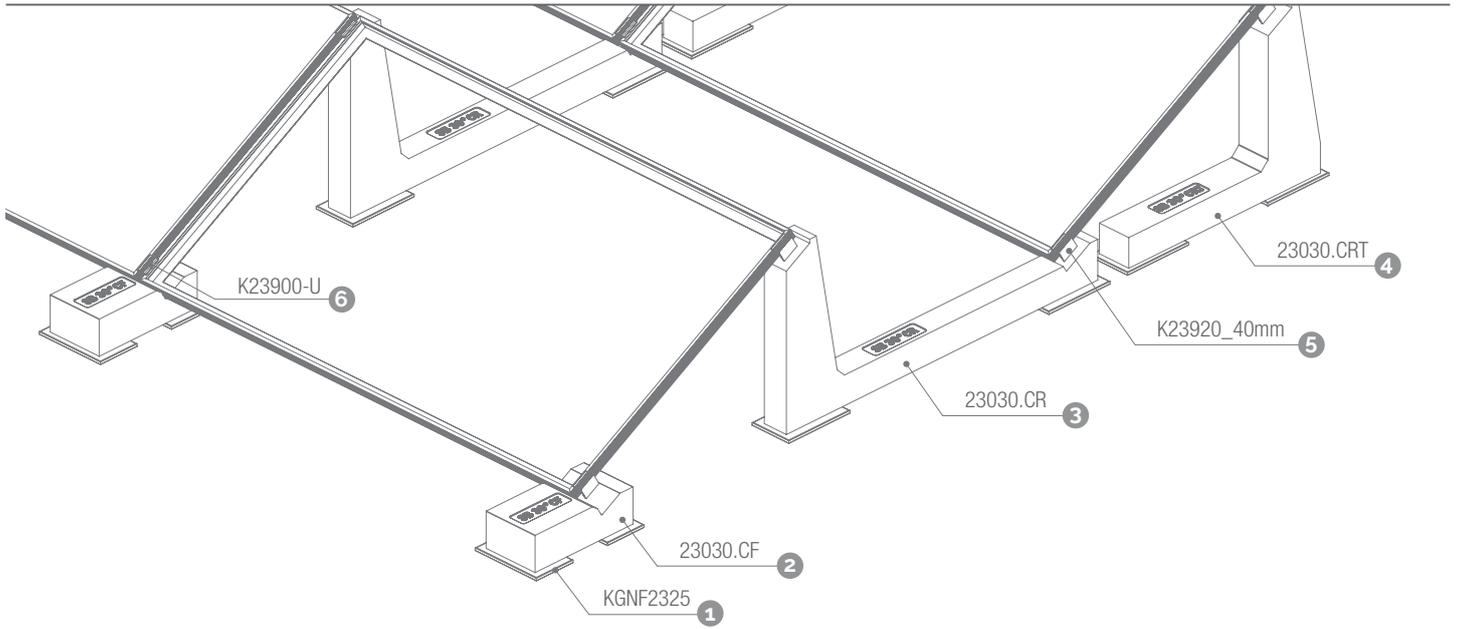

### INFO

The images shown are for illustrative purposes only and may differ slightly.

The dimensions indicated in this section are approximate; therefore, it is important to refer to the project developed by Sun Ballast®.

All dimensions shown in the figure are expressed in millimeters.

## TECHNICAL CHARACTERISTICS

### Description:

Precast unreinforced concrete ballast.  
(Inside, there is an iron rod to increase mechanical flexibility)

- Exposure class: XC4;
- Strength class: C32/40;
- Minimum cement content: 340 kg/m<sup>3</sup>;
- Fire resistance class: Class 0 (Italian class) A1 (European class with ref. UNI EN 13501-1:2019);
- Maximum H<sub>2</sub>O penetration depth under pressure 500 kPa: 15 mm;
- Maximum H<sub>2</sub>O penetration depth under pressure 500 kPa: 15 mm;
- Weight tolerance: ±5%;
- Measurement: ±5 mm;
- Determination of pullout force of M8 threaded insert embedded in CLS element by direct pulling of M8 threaded bar screwed into it.

Results of the tensile test at 15 KN (1530 kg):

No slipping of the threaded insert;

Fracture of the threaded bar.

BASIC S.R.L Benefit Corporation, in the person of its legal representative, declares that production complies with UNI EN 206 and UNI 11104 standards, instructions, and procedures of the quality management system by UNI EN ISO 9001:2015 with TUV certification.

Any modification made to the product referred to in this declaration without the manufacturer's authorization voids this declaration of technical requirements. The technical characteristics of the product are listed below.





**Made to last**  
Patented systems

## CONTACTS

---

### INFORMATION AND FIRST CONTACT

[info@sunballast.com](mailto:info@sunballast.com)

---


### COMMERCIAL CONSULTING

[commerciale@sunballast.com](mailto:commerciale@sunballast.com)

---

### TECHNICAL SUPPORT

[tecnico@sunballast.com](mailto:tecnico@sunballast.com)

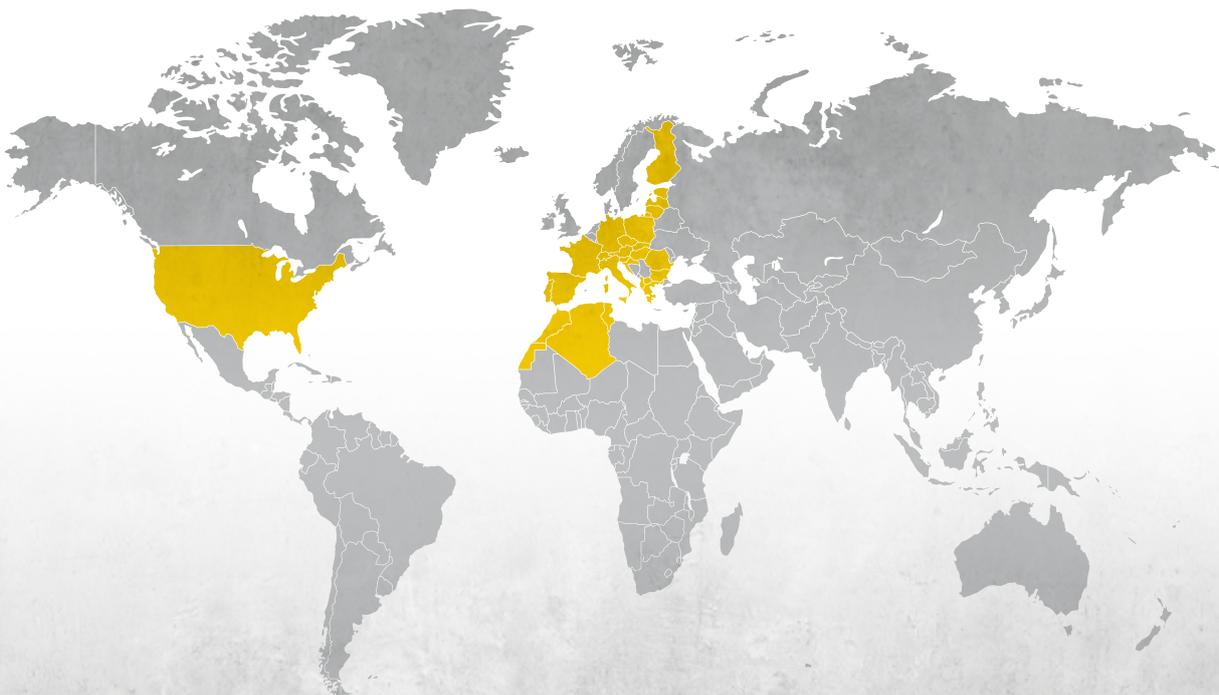

**MADE TO LAST.**

[www.sunballast.com](http://www.sunballast.com)